

Ultra-thin Wall-mounted Advertising Machine AD3201

instructions

Bozz^{博时特™}

Bozztek Technology (Shenzhen) Co., Ltd


Release version: V1.0

Date: 2021.11.6

Product Pictures



Product Description

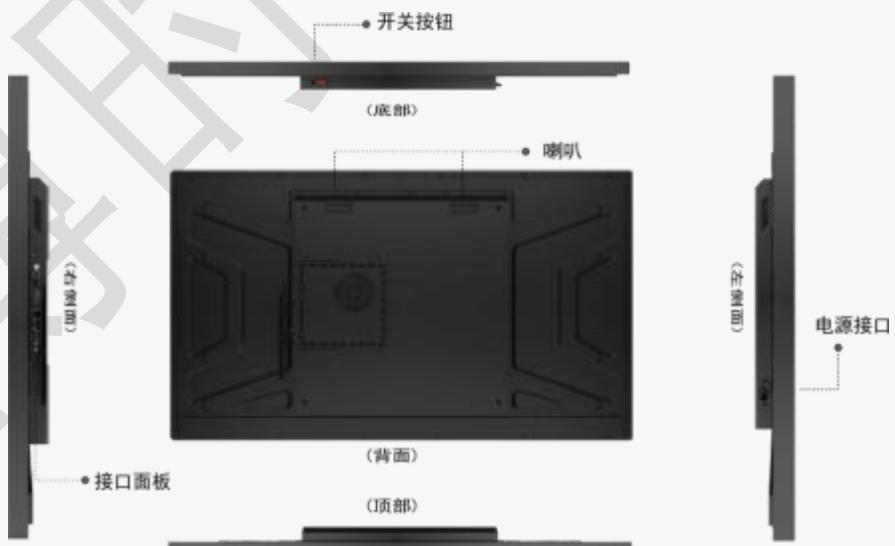

Product Features

- Tempered glass & aluminum alloy frame, stable and reliable structure
- Original A-series LCD screen with 2K resolution and 16.7M colors for vibrant displays
- Supports 1080P 60fps H.265/H.264 video encoding, 8M ISP, and HDR
- 2 USB ports, 1 HDMI port, and 1 RJ45 port to meet various needs
- Quad-core Cortex-A 55 chip with a clock speed of 1.8GHz
- Supports wired/wireless network connectivity, BT 4.0, and optional 4G module
- Supports landscape and portrait playback, and 360-degree rotation
- Supports auto-loop playback, smart screen splitting, and scheduled power on/off with powerful features
- Supports multiple client software installations, offering enhanced features and broader application scenarios


Parameter

LCD panel parameters	Diagonal size	32 inches
	type	TFT-LCD
	resolution ratio	1920×1080@60Hz
	Brightness (default)	300cd/m ²
	Contrast (default value)	1200:1
	Viewing Angle (V/H)	178°/178°
	Response time (gray scale)	8ms
	Visible area	697mm*390.5mm

	colour gamut	73%
	be in a poor light	LED
	Display scale	16:9
	life span	>30000H
system configuration	System version	Android 7.1
	CPU	Standard configuration: RK3566, quad-core ARM Cortex-A 55 & Mali G52 Optional: RK3288/RK3399/RK3576/RK3588
	GPU	Mali-G52
	basic frequency	1.8G Hz
	Memory (DDR4)	2G (4G optional)
	Flash memory	16GB (8GB/32GB/64GB available)
	Network support	Ethernet, WiFi, wireless peripheral expansion, 3G/4G (optional)
	suona	2*8Ω/5W (built-in)
	joggle	2 USB 2.0 ports, 1 RJ45 port, 1 HDMI port, 1 TF card slot, and 1 headphone jack
	power input	AC/100V~240V
power characteristics	standby power consumption	≤1W
	Power consumption (typical value)	80W
	Physical dimensions of bare machine	736mm × 430mm × 58.9mm (including the hanging bracket)
dimensions	packing measurement	865mm*565mm*200mm
	Wall-mounted bracket hole position	400mm×200mm
	Product weight without	10kg

environmental factor	accessories	
	Post-packaged product weight	12.5kg
	Appearance color	black
	cover glass	armoured glass
	Installation method	Wall-mounted/Embedded
	working temperature	-5°C~40°C
	working humidity	10%RH~90%RH
	Display Mode	S-IPS, always-on display, transmissive

Product Size

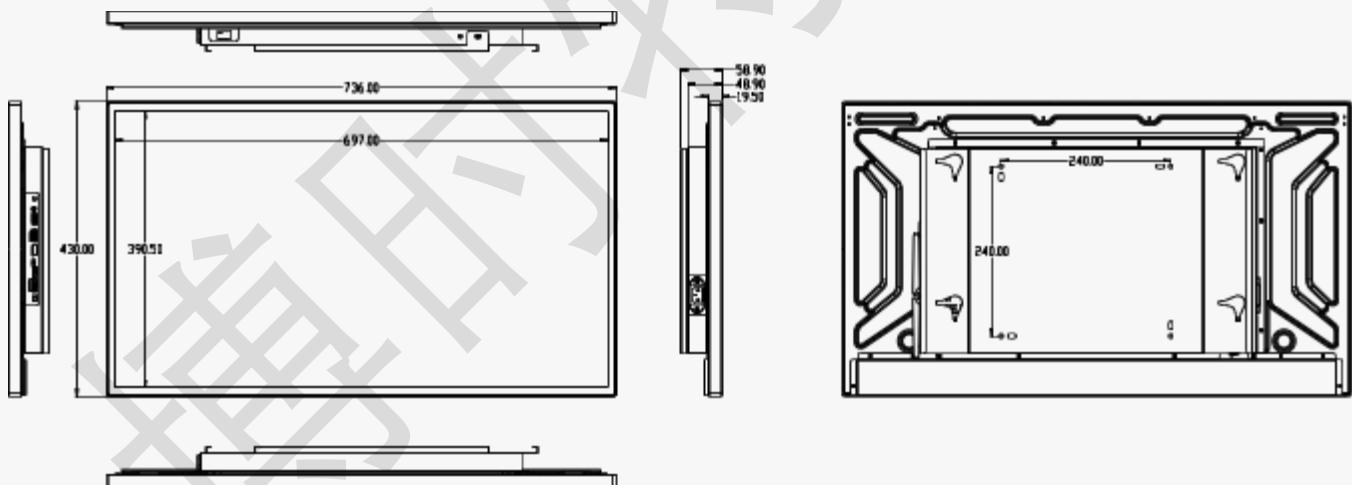

Transportation precautions:

1. During transportation, the machine must be placed strictly according to the markings on the outer packaging box and securely fixed to prevent tipping over or impact from external objects.

Especially if the impact occurs on the front of the display screen.

2. Long-distance single-unit transportation requires wooden boxes or scaffolding for protection.

Note: The content is for reference only. Please refer to the actual product. No further notice will be given if there are any changes.



