

# Ultra-thin Wall-mounted Advertising Machine AD5501 instructions

**Bozz** 博时特™

Bozztek Technology (Shenzhen) Co., Ltd


Release version: V1.0

Date: 2021.11.6

## Product Pictures



## Product Description

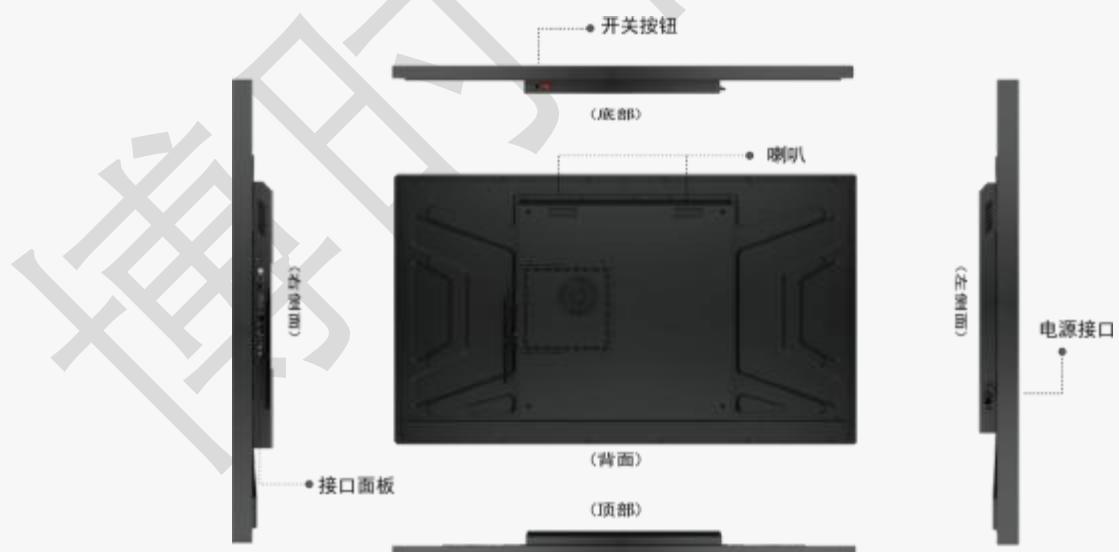

## Product Features

- Tempered glass & aluminum alloy frame, stable and reliable structure
- Original A-series LCD screen with 2K resolution and 16.7M colors for vibrant displays
- Supports 1080P 60fps H.265/H.264 video encoding, 8M ISP, and HDR
- 2 USB ports, 1 HDMI port, and 1 RJ45 port to meet various needs
- Supports wired/wireless network connectivity, BT 4.0, and optional 4G module
- Supports landscape and portrait playback, and 360-degree rotation
- Supports auto-loop playback, smart screen splitting, and scheduled power on/off with powerful features
- Supports multiple client software installations, offering enhanced features and broader application scenarios


## Parameter

LCD panel parameters	Diagonal size	55 inch
	type	TFT-LCD
	resolution ratio	1920×1080@60Hz
	Brightness (default)	300cd/m <sup>2</sup>
	Contrast (default value)	1200:1
	Viewing Angle (V/H)	178°/178°
	Response time (gray scale)	8ms
	Visible area	1210mm*680.5mm

	colour gamut	73%
	be in a poor light	LED
	Display scale	16:9
	life span	>30000H
system configuration	System version	Android
	CPU	Standard configuration: RK3566, quad-core ARM Cortex-A 55 & Mali G52 Optional: RK3288/RK3399/RK3576/RK3588
	Memory (DDR4)	2G (4G optional)
	Flash memory	16GB (8GB/32GB/64GB available)
	Network support	Ethernet, WiFi, wireless peripheral expansion, 3G/4G (optional)
	suona	2*8Ω/5W (built-in)
	joggle	2 USB 2.0 ports, 1 RJ45 port, 1 HDMI port, 1 TF card slot, and 1 headphone jack
power characteristics	power input	AC/100V~240V
	standby power consumption	≤1W
	Power consumption (typical value)	150W
dimensions	Physical dimensions of bare machine	1252mm×723mm×62mm (including the hanging bracket)
	packing measurement	1380mm*875mm*200mm
	Wall-mounted bracket hole position	400mm×200mm
	Product weight without accessories	25kg
	Post-packaged product weight	30kg

environmental factor	Appearance color	black
	cover glass	armoured glass
	Installation method	Wall-mounted/Embedded
	working temperature	-5°C~40°C
	working humidity	10%RH~90%RH
	Display Mode	S-IPS, always-on display, transmissive

## Product Size

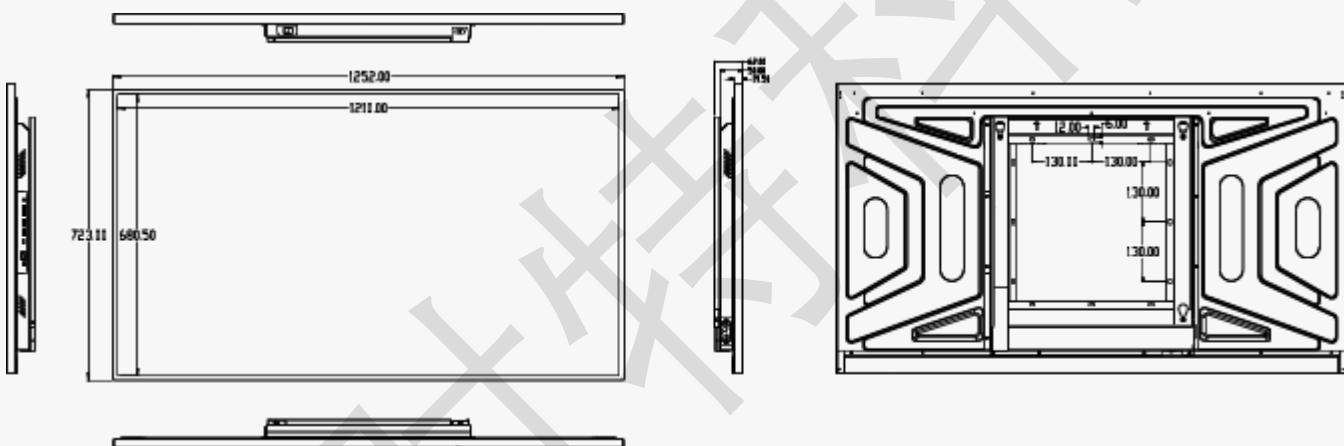

### Transportation precautions:

1. During transportation, the machine must be placed strictly according to the markings on the outer packaging box and securely fixed to prevent tipping over or impact from external objects.

Especially if the impact occurs on the front of the display screen.

2. Long-distance single-unit transportation requires wooden boxes or scaffolding for protection.

Note: The content is for reference only. Please refer to the actual product. No further notice will be given if there are any changes.