

43-inch vertical advertising all-in-one machine ADV4301 instructions



Bozztek Technology (Shenzhen) Co., Ltd.

Release version: V1.0

Date: 2022.09.07

Product Pictures



Product Description



Product Features

- Tempered glass & aluminum alloy frame, stable and reliable structure
- Original A-series LCD screen with 2K resolution and 16.7M colors for vibrant displays
- Supports 1080P 60fps H.265/H.264 video encoding
- 2 USB ports and 1 HDMI port on the side, with a protective door design to ensure data security
- Rear-mounted 1-channel RJ45 port, power switch, meets daily usage requirements
- Quad-core Cortex-A 55 chip with a clock speed of 1.8GHz
- Supports wired/wireless network connectivity, BT 4.0, and optional 4G module
- Supports auto-loop playback, smart split-screen, and scheduled power on/off with powerful features
- Supports multiple client software installations, offering enhanced features and broader application scenarios


Parameter

LCD panel parameters	Diagonal size	43 inches
	type	TFT-LCD
	resolution ratio	1080×1920@60Hz
	Brightness (default)	300cd/m ²
	Contrast (default value)	1200:1
	Viewing Angle (V/H)	178°/178°
	Response time (gray scale)	8ms

	Visible area	528.3mm*939.9mm
	colour gamut	73%
	be in a poor light	LED
	Display scale	9:16
	life span	>30000H
system configuration	System version	Android 7.1
	CPU	Standard configuration: RK3566, quad-core ARM Cortex-A 55 & Mali G52 Optional: RK3288/RK3399/RK3576/RK3588
	GPU	Mali-G52
	basic frequency	1.8G Hz
	Memory (DDR4)	2G (4G optional)
	Flash memory	16GB (8GB/32GB/64GB available)
	Network support	Ethernet, WiFi, wireless peripheral expansion, 3G/4G (optional)
	suona	2*8Ω/5W (built-in)
	Interface (Side)	2 USB 2.0 ports, 1 HDMI port, 1 TF card slot, and 1 headphone jack
	Interface (Rear)	RJ45×1
power characteristics	power input	AC/100V~240V
	standby power consumption	≤1W
	Power consumption (typical value)	100W
	Physical dimensions of bare machine	1790.0mm×597.9mm×480.0mm

dimensions	packing measurement	1833mm*682mm*143mm
	Product weight without accessories	29kg
	Post-packaged product weight	36kg
	Appearance color	black
	cover glass	armoured glass
	Installation method	vertical
environmental factor	working temperature	-5°C~40°C
	working humidity	10%RH~90%RH
	Display Mode	S-IPS, always-on display, transmissive

Product Size

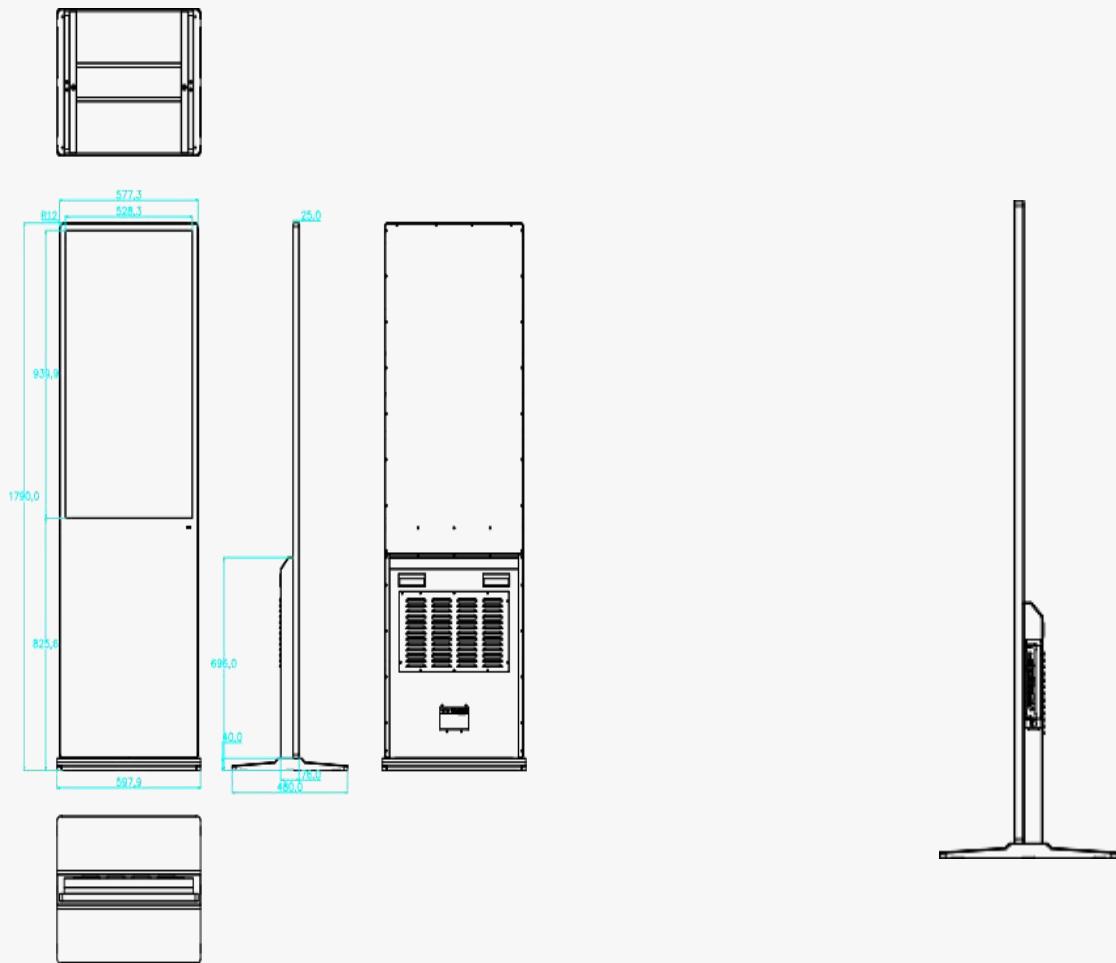

Transportation precautions:

1. During transportation, the machine must be placed strictly according to the markings on the outer packaging box and securely fixed to prevent tipping over or impact from external objects.

Especially if the impact occurs on the front of the display screen.

2. Long-distance single-unit transportation requires wooden boxes or scaffolding for protection.

Note: The content is for reference only. Please refer to the actual product. No further notice will be given if there are any changes.

Application Scenarios



Bank lobby



Large supermarkets



Medical Clinic